

SPECIAL METER SERIES

YF-1065 DIGITAL LUX METER

Features

- Safe-sealed photocell for long stability.
- Photosensor correctly designed in accordance with testing angles and visual sensitivity.
- Data hold switch to hold connecting recorder.
- OUT PUT jack for long-term connecting recorder use.

SPECIFICATIONS:

Ranges	Allowance	Remarks
0 - 200LUX	$\pm 4\% \text{rdg} \pm 0.5\% \text{ f.s.}$	Color temperature 2856°K connected by a standard bulb
0 - 2000LUX	$\pm 4\% \text{rdg} \pm 0.5\% \text{ f.s.}$	
0 - 20000LUX	$\pm 7\% \text{rdg} \pm 1\% \text{ f.s.}$	

Lux-sensing angles: 30° = below $\pm 2\%$, 60° = below $\pm 7\%$,
80° = below $\pm 25\%$



YF-225V VIDEO-HEAD TESTER


Features

- Self-shielded meter movement.
- Wide range measurement for range A range B range C.
- With the best view angle stand.
- Available for both VHS system-YF-225V.
- Automatic internal battery check.

SPECIFICATIONS:

MODEL: YF-225V (VHS)

Range	Measuring Range
A	approx 0.2 - 3.5μH
B	approx 0.8 - 3.0μH
C	approx 0.5 - 1.5μH

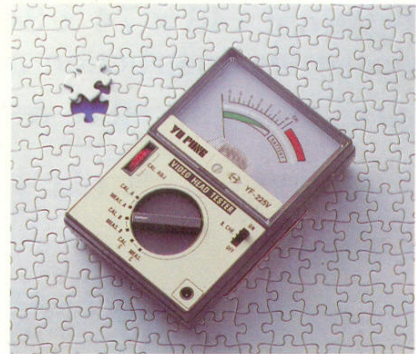

YF-20 SOUND LEVEL METER

Features

- Unique selecting switch for easy operation.
- Special integrated circuit for long stability.
- Applying JIS dB(A) specification, with LO (40-80dB) and Hi (80-120dB) test range.

SPECIFICATIONS:

- Ranges: LO: 40 - 80dB
Hi: 80 - 120dB
- Microphon: With Capacitance Microphone
- Calibration: With Signal Oscillator



YF-80

PHASE SEQUENCE INDICATOR

Features

- Checking if currents of three different ratings are in proper phase.
- Preventing motor from running backwards and damage on appliance.

SPECIFICATIONS:

- Measuring Range: Frequency: 25-65Hz Voltage: 50-500V.
- Operating Temp: 0°C-40°C Operating Humidity: Less than 80% RH. Insulation Protection: DC 6KV.
- Open phase check: LED. • Phase Rotation Indication: LED and Buzzer. • Low Battery Indication: LED.
- Dimension: 105(L)x62(W)x24(H)mm. Weight: 206g approx (including battery).
- Accessory: Carrying Case, Battery, Manual.



YU FONG ELECTRIC CO., LTD.

2nd Fl., No. 376, Tun Hwa South Rd., Sec. 1, Taipei,
Taiwan, R.O.C.

Tel: 703-5494-8 Telex: 25713 YUFONG CO.,

Cable: YUFONG CO., TAIPEI Fax: 886-2-700-7532 YU FONG

Distributor: _____