

L358VDC

3.5~8mm F1.4 - CS-Mount

Compatible with 1/3" & 1/4" Cameras

Focal Length: 3.5~8mm
Max. Relative Aperture: 1:1.4

Iris: F1.4~Approx. F360

With ND Spot Filter

Angular Field of View: 1/3": $68.9^{\circ} \times 54.4^{\circ}$ at 3.5mm

 $33.4^{\circ} \times 25.4^{\circ}$ at 8mm 1/4": $54.4^{\circ} \times 42.2^{\circ}$ at 3.5mm

 $25.4^{\circ} \times 19.1^{\circ}$ at 8mm

Min. Object Distance

(M.O.D.): 0.3m (From Front Vertex)

Optical Back Focal

Distance: 8.5~13.2mm (In Air)

Operation: Zoom: Manual Focus: Manual

Iris: IG (Auto-Close System)

Operation Voltage: Close to Open: Less than 3V

Open to Close: More than 0.5V


Operation Temperature: $-10 \sim +50^{\circ}\text{C} \text{ (+14} \sim 122^{\circ}\text{ F)}$

Filter Size: None
Mount: CS-Mount

(Adjustable Lens Position)

Size, Approx. Weight: $37 \times 44 \times 44$ mm (w/h/d), 67g

(Approx. $1.5 \times 1.7 \times 1.7$ in., 2.4oz.)

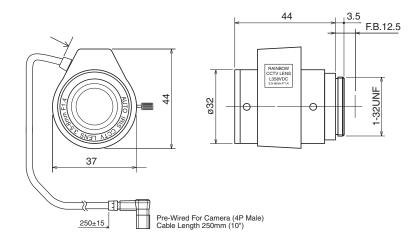

Camera Connector Wiring		
1 3	Pin	Signal
	1	Brake – *
	2	Brake + *
	3	Drive +
2 4	4	Drive –
*		

* Also referred to as DAMP, CONTROL, or DUMP